

RenShape® SL

Accurate and durable
general purpose SL resin

7800

Key features

- Ultra low ash content (reduced by 95-98%) which is suitable for QuickCast™ application
- Improved retention of strength and dimensions of parts in humid condition
- Built parts passes the USP 23 Class VI test (same as our medical modeling grade resins)
- Low viscosity of liquid resin permits easy recoating and draining of parts and allows easy cleaning of parts and machines
- Good green strength requires minimal part finishing
- Superior vat life to current SL resins on the market

Key benefits

- Users can build accurate and tough parts that retain dimensions and impact resistance over time without switching vat for different applications
- Less part finishing time with ease of post-curing
- Higher quality casting masters for the investment casting parts

Key applications

Designed for use on solid state SLA® platforms, RenShape® SL 7800 is suitable for master patterns, concept models, functional prototypes and general parts.



7800 RenShape® SL

HUNTSMAN

Enriching lives through innovation

RenShape® SL 7800 stereolithography material is a general purpose resin that combines accuracy with durability. This clear, light amber-coloured photopolymer is designed to produce accurate concept models and functional prototypes with a unique combination of high impact strength and elongation, which eliminates the need to switch photopolymers for each new applications. New RenShape® SL 7800 solid-state resin also conforms to FDA-approved USP 23 Class VI testing for use in medical modeling and prototyping.

Liquid material




Appearance	Clear amber liquid
Density at 77°F	1.12 g/cm ³
Viscosity	
at 82°F	300 cps
at 86°F	205 cps
Penetration depth (Dp)	
on SLA 7000/5000 systems	5.74 mils
on SLA 500/3500/Viper Si2 systems	5.67 mils
Critical exposure (Ec)	
on SLA 7000/5000 systems	9.98 mJ/cm ²
on SLA 500/3500/Viper Si2 systems	9.51 mJ/cm ²
Part building layer thickness*	0.004 in.

* Dependent upon part geometry and build parameters

Post-cured material

	90-minute UV post-cure	90-minute UV + 2 hours @ 176°F thermal post-cure
Hardness ASTM D-2240	87 Shore D	87 Shore D
Flexural modulus ASTM D-790	330-380 ksi	340-380 ksi
Flexural strength ASTM D-790	9 900-10 600 psi	10 400-10 600 psi
Tensile modulus ASTM D-638	300-350 ksi	310-320 ksi
Tensile strength ASTM D-638	6 000-6 800 psi	6 400 psi
Elongation at break ASTM D-638	10-18%	10-15%
Impact strength, notched Izod ASTM D-256	0.7-1.1 ft.-lb./in.	0.7-0.9 ft.-lb./in.
Heat deflection temperature ASTM D-648 @ 66 psi	144°F	144°F
Glass transition, Tg DMA, E" peak	135°F	138°F
Coefficient of thermal expansion TMA (T<Tg)	100x10 ⁻⁶ / °C	109x10 ⁻⁶ / °C
Density	1.15 g/cm ³	-

Comparison tables

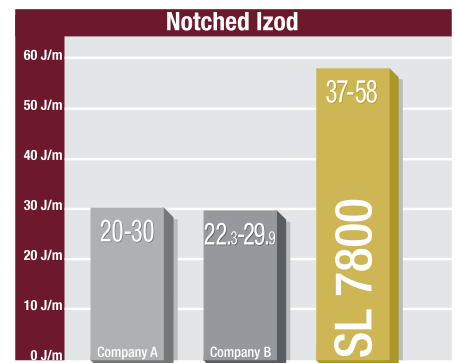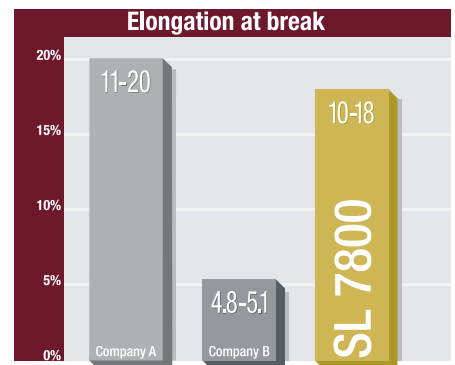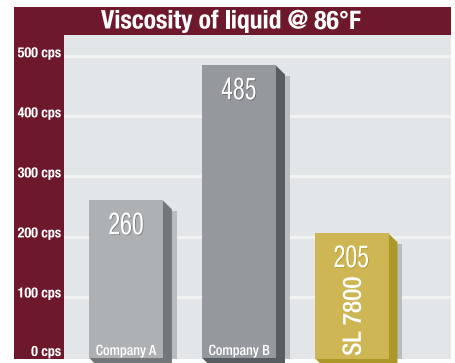

Huntsman Advanced Materials (Americas) Inc, Americas Customer Service Center, 10003 Woodloch Forest Drive, The Woodlands, Texas 77380, USA • Tel +1 281 719 6000
Fax +1 281 719 6416 • Fax +1 713 235 6416 • advanced_materials@huntsman.com • www.huntsman.com/advanced_materials

Sales of the product described herein ("Product") are subject to the general terms and conditions of sale of either Huntsman Advanced Materials LLC, or its appropriate affiliate including without limitation Huntsman Advanced Materials (Europe) BVBA, Huntsman Advanced Materials Americas Inc., or Huntsman Advanced Materials (Hong Kong) Ltd. ("Huntsman"). The following supercedes Buyer's documents.

Huntsman warrants that at the time and place of delivery all Products sold to Buyer shall conform to the specifications provided to Buyer by Huntsman.

While the information and recommendations included in this publication are, to the best of Huntsman's knowledge, accurate as of the date of publication, NOTHING CONTAINED HEREIN (EXCEPT AS SET FORTH ABOVE REGARDING CONFORMANCE WITH SPECIFICATIONS PROVIDED TO BUYER BY HUNTSMAN) IS TO BE CONSTRUED AS A REPRESENTATION OR WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHTS, OR WARRANTIES AS TO QUALITY OR CORRESPONDENCE WITH PRIOR DESCRIPTION OR SAMPLE, AND THE BUYER ASSUMES ALL RISK AND LIABILITY WHATSOEVER RESULTING FROM THE USE OF SUCH PRODUCT, WHETHER USED SINGLY OR IN COMBINATION WITH OTHER SUBSTANCES.

No statements or recommendations made herein are to be construed as a representation about the suitability of any Product for the particular application of Buyer or user or as an inducement to infringe any patent or other intellectual property right. Buyer is responsible to determine the applicability of such information and recommendations and the suitability of any Product for its own particular purpose, and to ensure that its intended use of the Product does not infringe any intellectual property rights.

The Product may be or become hazardous. The Buyer should obtain Material Safety Data Sheets and Technical Data Sheets from Huntsman containing detailed information on Product hazards and toxicity, together with proper shipping, handling and storage procedures for the Product, and should comply with all applicable governmental laws, regulations and standards relating to the handling, use, storage, distribution and disposal of, and exposure to the Product. Buyer shall also take all steps necessary to adequately inform, warn and familiarize its employees, agents, direct and indirect customers and contractors who may handle or be exposed to the Product of all hazards pertaining to and proper procedures for safe handling, use, storage, transportation and disposal of and exposure to the Product, and the containers or equipment in which the Product may be handled, shipped or stored.

RenShape® is a registered trademark of Huntsman Corporation or an affiliate thereof in one or more, but not all, countries. © 2007 Huntsman Advanced Materials Americas Inc.